

RVS overdrukbehuizingen - type INDEX.E.Y Stainless Steel pressurized boxes - type INDEX.E.Y

Technische informatie

Ex markering: Ⓜ II 2G Ex px/py edm [ia/ib] II T6 Gb
 Ⓜ II 2D Ex pD21 IP6X T80/95/120°C
 Ⓜ II 2D Ex t IIIB/IIIC T80/95/120°C Db IP6X

Geschikt voor zone 1,2, 21 en 22

Omgevingstemperatuur: $-20^{\circ}\text{C} \leq T_a \leq 55^{\circ}\text{C}$

Omgevingstemperatuur optioneel: $-20^{\circ}\text{C} \leq T_a \leq 55^{\circ}\text{C}$

Beschermingsgraad: IP65 (66)

Materiaal: RVS 304 (optioneel 316)

Conform de standaards: EN60079

Technical data:

Ex mark: Ⓜ II 2G Ex px/py edm [ia/ib] II T6 Gb

Ⓜ II 2D Ex pD 21 IP6X T80/95/120°C

Ⓜ II 2D Ex t IIIB/IIIC T80/95/120°C Db IP6X

Can be used in zone 1,2, 21 and 22


Ambient temperature: $-20^{\circ}\text{C} \leq T_a \leq 40^{\circ}\text{C}$

optional temperature : $-20^{\circ}\text{C} \leq T_a \leq 55^{\circ}\text{C}$

Degree of protection: IP65 (66)

Material: Stainless Steel 304 (optional 316)

Meets the standards: EN60079

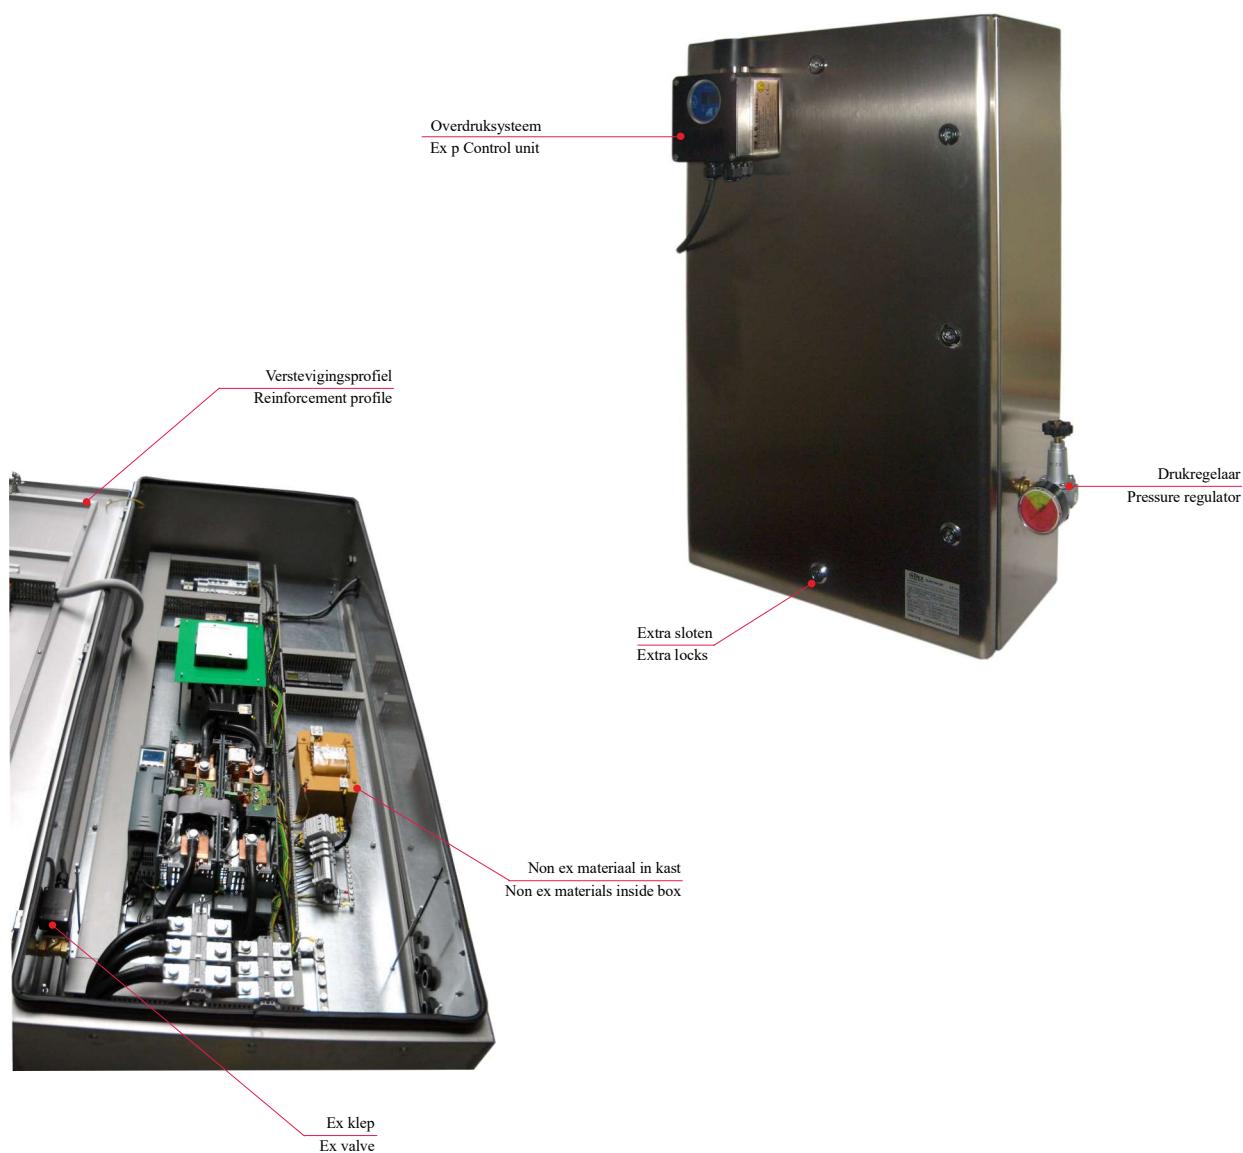

Overdrukkasten type INDEX.E.Y - toebehoren Pressurized boxes type INDEX.E.Y - accessories

Afbeelding Illustration	Omschrijving Description		Type
	Overdruksysteem zone 1 Ex p control unit zone 1	230 VAC 115 VAC 24 VAC 24 VDC	F350 / 230 F350 / 115 F350 / 24A F350 / 24D
	Overdruksysteem zone 2 Ex p control unit zone 2	230 VAC 115 VAC 24 VAC 24 VDC	F320 / 230 F320 / 115 F320 / 24A F320 / 24D
	Drukregelaar + klep Pressure regulator + valve	230 VAC 115 VAC 24 VAC 24 VDC	F220 / 230 F220 / 115 F220 / 24A F220 / 24D
	Spoelklep t.b.v. grote volumes Outlet valve for big volumes	230 VAC 115 VAC 24 VAC 24 VDC	F220.40 / 230 F220.40 / 115 F220.40 / 24A F220.40 / 24D
	Regenkap Rain cover	t.b.v. F 320 en F 350 For F320 and F350	F240
	Luchtslang 6 mm - Ex Air tube 6 mm - Ex	Zwart / Black Rood / Red Blauw / Blue	F220.Z6 F220.R6 F220.B6
	Toetsenbord Exi Keyboard Exi	Qwerty	TT - 1081BUS
	Muis Exi Mouse Exi		KM 25SIB1